



Digital Equipment Corporation

ENGINEERING SPECIFICATION

Date: March 4, 1998

Title: PCXRA-AU 6.4GB UDMA IDE Interface 3 1/2" Disk Drive

Proprietary Information:

This document contains proprietary information of Digital Equipment Corporation. This document and the information it contains may be used in the design, production, or manufacture of products for Digital Equipment Corporation.

Digital Internal Use Only

Copyright © 1997 Digital Equipment Corporation

REVISIONS

| REV | DESCRIPTION            | CHG NO  | ORIG    | DATE   | APPD BY   | DATE   |
|-----|------------------------|---------|---------|--------|-----------|--------|
| A   | Release to ECO Control | Initial | D. Pham | 9/97   | B. McLane | 9/97   |
| B   | ECO                    | #1      | D. Pham | 1/9/98 | B. McLane | 1/9/98 |

ECO History:

\* Document Initial Released 9/97 at rev A

To release the Quantum Ultra DMA/33 ST6.4A drive with Firmware rev: A0F.08 and A0F:0E

Digital p/n PCXRA-AU A01 and A03

\* ECO#1 1/9/98 document rev B

To reflect the newer Quantum UDMA Fireball SE6.4A FW: API.0C drive as the replacement for the ST6.4A

Digital p/n PCXRA-AU rev. A04

| Engineer            | Approved         | Size     | Code      | Number       | Rev      |
|---------------------|------------------|----------|-----------|--------------|----------|
| <b>D. Pham</b>      | <b>B. McLane</b> | <b>K</b> | <b>SP</b> | PCXRA-AU-DBT | <b>B</b> |
| <b>Sheet 1 of 1</b> |                  |          |           |              |          |



Digital Equipment Corporation

ENGINEERING SPECIFICATION

Date: March 4, 1998

Title: PCXRA-AU 6.4GB UDMA IDE Interface 3 1/2" Disk Drive

GENERAL DESCRIPTION:

This specification defines the detailed requirements of a 3 1/2 inch, 6.4 gigabyte (formatted) disk drive with an Integrated Drive Electronics (IDE) Interface. This disk drive, which is a low cost, random-access, rotating memory device stores data in fixed-length blocks on rigid media disks. The storage medium contained within the drive is in a fixed, non-operator-removable configuration

APPLICABLE DOCUMENTS (per latest revision on date of order):

International Organization For Standardization Standards:

ISO DIS 7779 Acoustics: Measurement of Noise Emitted from Computer Business Equipment - Second draft proposal June, 1982

ISO 9000 Quality Management and Quality Assurance

Federal Communications Commission:

FCC Part 15, Subpart B for class B equipment in an enclosure

Underwriter's Laboratories, Inc.

UL-STD-1950 Safety of information Technology Equipment with sub clauses 1-7 Applicable Appendix and Supplement B.

Canadian Standards Association:

CSA-STD-C22.2 No. 950 Safety of Information Technology Equipment including Electrical Business Equipment.

International Electrotechnical Commission:

EN-60950(IEC 950) Safety of Telecommunications Apparatus including Information Processing Equipment

C.I.S.P.R.-22 Class B

|                     |                  |          |           |                     |          |
|---------------------|------------------|----------|-----------|---------------------|----------|
| Engineer            | Approved         | Size     | Code      | Number              | Rev      |
| <b>D. Pham</b>      | <b>B. McLane</b> | <b>K</b> | <b>SP</b> | <b>PCXRA-AU-DBT</b> | <b>B</b> |
| <b>Sheet 2 of 2</b> |                  |          |           |                     |          |



Digital Equipment Corporation

ENGINEERING SPECIFICATION

Date: March 4, 1998

Title: PCXRA-AU 6.4GB UDMA IDE Interface 3 1/2" Disk Drive

The Council of European Communities:

89/366/EEC C E Mark

SFF Committee:

SFF-8035i Self-Monitoring, Analysis and Reporting Technology (S.M.A.R.T.)

Quantum Corporation:

81-114823-01 Quantum Fireball SE6.4A Product Manual

2.0 Drive Requirements:

This drive will comply to the product description in the supplier's product manual, for the Quantum SE6.4A and this specification.

2.1 Drive Performance:

The following parameters are the minimum requirements to meet this product specification.

A. Formatted Capacity:

Per Drive (megabytes) 6,448
Per Block(bytes) 512
Blocks per Drive(User) 12,594,960
Interleave 1:1

B. Transfer Rate:

To/From Media (Max) 19.75 Mbyte/sec
To/From Buffer (Max) 16.67 Mbyte/sec PIO Mode 4
To/From Buffer (Max) 16.67 Mbyte/sec DMA Mode 2
To/From Buffer (Max) 33.00 Mbyte/sec UDMA Mode 2
Buffer Size 128 Kbyte

Table with 5 columns: Engineer, Approved, Size, Code, Number, Rev. Values: D. Pham, B. McLane, K, SP, PCXRA-AU-DBT, B. Includes footer 'Sheet 3 of 3'.



Digital Equipment Corporation

ENGINEERING SPECIFICATION

Date: March 4, 1998

Title: PCXRA-AU 6.4GB UDMA IDE Interface 3 1/2" Disk Drive

C. Seek Time:(all times are nominal)

|                       |      |
|-----------------------|------|
| Track to Track (msec) | 2.0  |
| Average Read (msec)   | 9.5  |
| Average Write (msec)  | 11.0 |
| Full Stroke (msec)    | 20.0 |

D. All times are for nominal power and environmental conditions. Average seek time is determined by dividing the total time required to seek between all possible pairs of track addresses in the forward and reverse direction, by the total number of these possible seeks.

|                            |                 |                    |
|----------------------------|-----------------|--------------------|
| Average Rotational Latency | 5.56 msec       |                    |
| Rotational Speed (± 0.5%)  | 5400 RPM        |                    |
| Power-on to Drive Ready    | Typical: 15 sec | Worst case: 45 sec |
| Standby to Interface Ready | Typical: 10 sec | Worst case: 45 sec |
| Spindown - Standby Command | Typical: 9 sec  | Worst case: 15 sec |
| Spindown - Power Loss      | Typical: 18 sec | Worst case: 30 sec |

2.2 Drive Logical Parameters:

|                  |            |
|------------------|------------|
| Cylinders        | 13,328     |
| Heads            | 15         |
| Sectors          | 63         |
| Blocks per Drive | 12,594,960 |

3.0 Physical Specifications:

3.1 Mechanical Dimensions (See Figure 1):

|              |                         |
|--------------|-------------------------|
| Height (Max) | 25.90 mm (1.02 Inches)  |
| Width (Max)  | 102.20 mm (4.02 Inches) |
| Depth (Max)  | 146.70 mm (5.77 Inches) |
| Weight (Max) | 0.549 Kg (1.21 Pounds)  |


|                     |                  |          |           |              |          |
|---------------------|------------------|----------|-----------|--------------|----------|
| Engineer            | Approved         | Size     | Code      | Number       | Rev      |
| <b>D. Pham</b>      | <b>B. McLane</b> | <b>K</b> | <b>SP</b> | PCXRA-AU-DBT | <b>B</b> |
| <b>Sheet 4 of 4</b> |                  |          |           |              |          |

3.2 Drive Mounting:

The mounting holes allow the drive to be mounted in any orientation. For mounting, #6-32 x 1/4 UNC screws are recommended. Mounting screw torque should be 8 lbf-inch maximum.

**NOTE:** Caution should taken to ensure that the mounting screws do not damage the drive PCBA

Figure 1: Typical Drive Mounting Dimensions

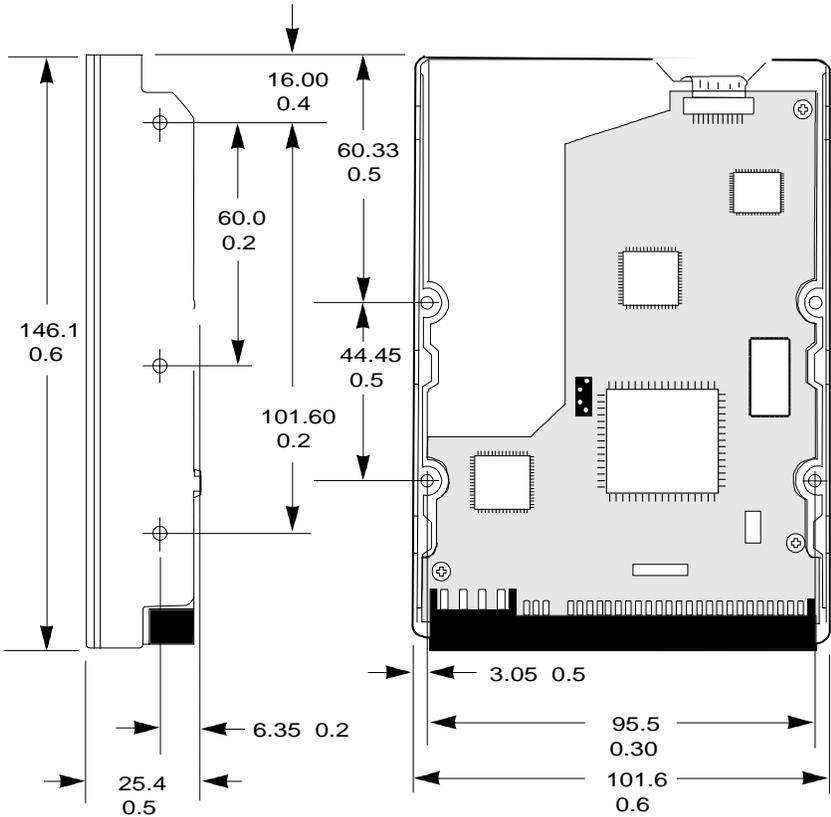

|                     |                  |          |           |              |          |
|---------------------|------------------|----------|-----------|--------------|----------|
| Engineer            | Approved         | Size     | Code      | Number       | Rev      |
| <b>D. Pham</b>      | <b>B. McLane</b> | <b>K</b> | <b>SP</b> | PCXRA-AU-DBT | <b>B</b> |
| <b>Sheet 5 of 5</b> |                  |          |           |              |          |



Digital Equipment Corporation

ENGINEERING SPECIFICATION

Date: March 4, 1998

Title: PCXRA-AU 6.4GB UDMA IDE Interface 3 1/2" Disk Drive

4.0 Power Requirements:

Supply Voltage Requirement: The voltages required to operate the drive are +5VDC ±5%, and +12VDC ±10% measured at the interface side of the power connector referenced to its associated return ground. Maximum power supply ripple allowed: 100 mV(+5V) 250 mV(+12V) peak to peak, 0-20 MHz.

4.1 Drive Current Requirements: All values are typical except Spin-up Mode.

|               | 12V +/- 10% | 5VDC +/- 5% | Power  |
|---------------|-------------|-------------|--------|
| Max Seek      | 830 ma      | 520 ma      | 12.5 W |
| R/W On Track  | 310 ma      | 650 ma      | 7 W    |
| Idle          | 280 ma      | 420 ma      | 5.5 W  |
| Standby/Sleep | 18 ma       | 170 ma      | 1 W    |
| Spin-up(Max)  | 1,650 ma    | 650 ma      | 23 W   |

5.0 Acoustics: at Idle 35 dBa Max @ 1 meter


|                     |                  |          |           |              |          |
|---------------------|------------------|----------|-----------|--------------|----------|
| Engineer            | Approved         | Size     | Code      | Number       | Rev      |
| <b>D. Pham</b>      | <b>B. McLane</b> | <b>K</b> | <b>SP</b> | PCXRA-AU-DBT | <b>B</b> |
| <b>Sheet 6 of 6</b> |                  |          |           |              |          |

Date: March 4, 1998

Title: PCXRA-AU 6.4GB UDMA IDE Interface 3 1/2" Disk Drive

## 6.0 Jumper Configuration:

DS Drive Select  
 PK Jumper Parking Position  
 CS Cable Select

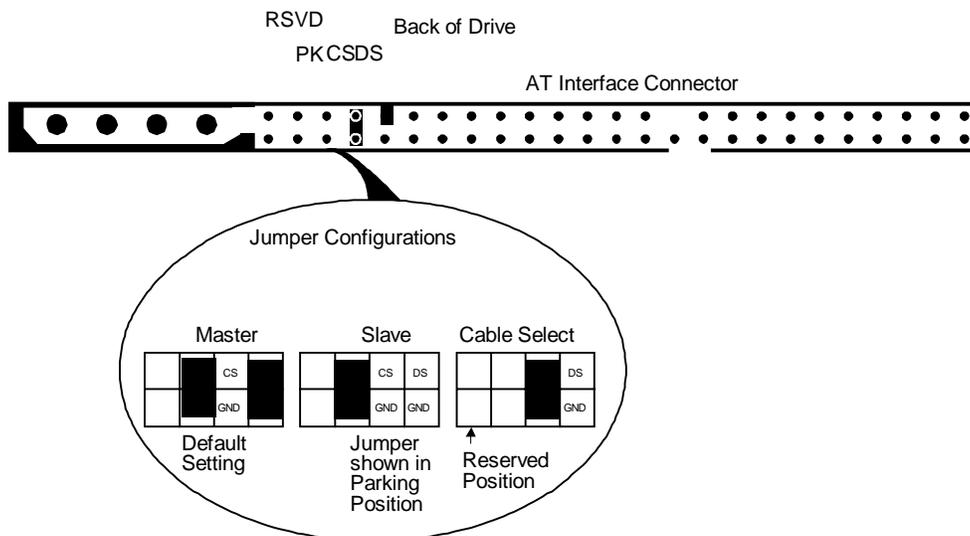

|                |                  |          |           |              |          |
|----------------|------------------|----------|-----------|--------------|----------|
| Engineer       | Approved         | Size     | Code      | Number       | Rev      |
| <b>D. Pham</b> | <b>B. McLane</b> | <b>K</b> | <b>SP</b> | PCXRA-AU-DBT | <b>B</b> |
| Sheet 7 of 7   |                  |          |           |              |          |



Digital Equipment Corporation

ENGINEERING SPECIFICATION

Date: March 4, 1998

Title: PCXRA-AU 6.4GB UDMA IDE Interface 3 1/2" Disk Drive

7.0 AT Interface connector pin assignments:

7.1 In the following table:

- indicates active low signal.

Direction(Dir) is with respect to the drive.

IN indicates input to the drive.

OUT indicates output from the drive.

I/O indicates the signal is bi-directional

Reserved pins/ground do not have direction

PDIAG- and DASP- are used for communication between the Master and Slave drives.

| Pin | Signal  | Dir | Pin | Signal      | Dir    |
|-----|---|-----|-----|-------------|--------|
| 1   | RESET-  | IN  | 2   | Ground      | -      |
| 3   | Data Bit 7  | I/O | 4   | Data Bit 8  | I/O    |
| 5   | Data Bit 6  | I/O | 6   | Data Bit 9  | I/O    |
| 7   | Data Bit 5  | I/O | 8   | Data Bit 10 | I/O    |
| 9   | Data Bit 4  | I/O | 10  | Data Bit 11 | I/O    |
| 11  | Data Bit 3  | I/O | 12  | Data Bit 12 | I/O    |
| 13  | Data Bit 2  | I/O | 14  | Data Bit 13 | I/O    |
| 15  | Data Bit 1  | I/O | 16  | Data Bit 14 | I/O    |
| 17  | Data Bit 0  | I/O | 18  | Data Bit 15 | I/O    |
| 19  | Ground  | -   | 20  | Key         | No Pin |
| 21  | DMARQ   | OUT | 22  | Ground      | -      |
| 23  | DIOW-<br>STOP   | IN  | 24  | Ground      | -      |
| 25  | DIOR-<br>HDMARDY- DMA ready on data in bursts<br>HSTROBE Data strobe on data out bursts | IN  | 26  | Ground      | -      |
| 27  | IORDY<br>DDMARDY- DMA ready on data out bursts<br>DSTROBE Data strobe on data in bursts | OUT | 28  | CSEL        | -      |
| 29  | DACK1-  | IN  | 30  | Ground      | -      |
| 31  | INTRQ   | OUT | 32  | Reserved    | -      |
| 33  | DA1   | IN  | 34  | PDIAG-      | I/O    |
| 35  | DA0   | IN  | 36  | DA2         | IN     |
| 37  | CS1FX-  | IN  | 38  | CS3FX-      | IN     |
| 39  | DASP-   | I/O | 40  | Ground      | -      |

|                     |                  |          |           |              |          |
|---------------------|------------------|----------|-----------|--------------|----------|
| Engineer            | Approved         | Size     | Code      | Number       | Rev      |
| <b>D. Pham</b>      | <b>B. McLane</b> | <b>K</b> | <b>SP</b> | PCXRA-AU-DBT | <b>B</b> |
| <b>Sheet 8 of 8</b> |                  |          |           |              |          |



Digital Equipment Corporation

ENGINEERING SPECIFICATION

Date: March 4, 1998

Title: PCXRA-AU 6.4GB UDMA IDE Interface 3 1/2" Disk Drive

7.2 Interface Connectors:

The recommended connectors and their numbers are shown below:

- 7.3 40-Pin Connector 3M 3417-7000 or equivalent
Strain Relief 3M 3448-2040 or equivalent
Flat Cable(Stranded 28 AWG) 3M 3365-40 or equivalent
Flat Cable(Stranded 28 AWG) 3M 3517-40 (shielded) or equivalent

Note: The Maximum cable length is 45.7 cm(18 in), to key the IDE mating connector you must plug the hole at pin 20.

7.4 DC Power Connector:

- 4-pin power connector AMP P/N 84069-1 or equivalent
Loose-piece contacts AMP P/N 61173-4 or equivalent
Strip contacts AMP P/N 350078-4 or equivalent
Strip contacts Molex P/N 39-00-0023 or equivalent
Loose-piece contacts Molex P/N 39-00-00341 or equivalent

8.0 Reliability:

8.1 MTBF:

The disk drive shall demonstrate 500,000 hours MTBF as measured by the Ongoing Reliability Test and schedule defined in Exhibit "C" of the Basic Order Agreement.

Table with 6 columns: Engineer, Approved, Size, Code, Number, Rev. Values: D. Pham, B. McLane, K, SP, PCXRA-AU-DBT, B. Includes footer 'Sheet 9 of 9'.



Digital Equipment Corporation

ENGINEERING SPECIFICATION

Date: March 4, 1998

Title: PCXRA-AU 6.4GB UDMA IDE Interface 3 1/2" Disk Drive

9.0 Drive Ship Configuration: The following drive parameters will be set at the factory prior to shipment.

9.1 Quantum Jumper Configuration:

DS Jumpered.
PK Jumpered.

9.2 Quantum Configuration page:

Byte 32

Prefetch Enable Enabled
Cache Enable Enabled

Byte 36

Auto Write Reallocation Enable Enabled
Auto Read Reallocation Enabled
Read Continuous Disabled
Enable Early Correction Disabled
Disable Correction Disabled

Byte 37

Number of Retries Set to Eight

Byte 38

ECC Correction Span Set to 24

Byte 39

Write Cache Enable Enabled
Reallocate Uncorrectable Errors Enabled

Table with 5 columns: Engineer, Approved, Size, Code, Number, Rev. Values include D. Pham, B. McLane, K, SP, PCXRA-AU-DBT, B. Includes footer 'Sheet 10 of 10'.