digital™

EC–QDQVA–TE

DECchip 21064A-233, -275
Alpha AXP Microprocessor
Data Sheet Update

This document provides updated information for the *DECchip 21064A-233, -275 Alpha AXP Microprocessor Data Sheet*, EC–N0699–72.

The following table replaces Table 21, **DC Input/Output Characteristics**.

Symbol	Description	Min	Max	Units	Test Conditions
Vdd	Power supply voltage	3.135	3.465	V	–
Vih	High-level input voltage (except dcOk_h and cont_l)	2.0	–	V	–
Vihs	High-level input voltage (static pins dcOk_h and cont_l)	2.7	–	V	–
Vil	Low-level input voltage	–	0.8	V	–
Voh	High-level output voltage Ioh = 100 μA	2.4	–	V	–
Vol	Low-level output voltage Iol = 3.2 mA	–	0.4	V	–
Vdiffc	Differential clock input swing (duty cycle 45–55%)	300 mV	3.0	V	–
Iil	Input leakage current (except eclOut_h)	–100	100	μA	0<Vin<Vdd V
Iel	Input leakage current (eclOut_h)	–150	150	μA	0<Vin<Vdd V
Ioz	Output leakage current (tristate)	–100	100	μA	–
Icin	Clock input leakage	–4	4	mA	0<Vin<3.465 V

Note: Values in this table are valid only for Vref = 1.4 V.

© Digital Equipment Corporation 1994. All rights reserved. Printed in U.S.A.
Alpha AXP, AXP, DECchip, Digital, and the DIGITAL logo are trademarks of Digital Equipment Corporation.

The following figure replaces Figure 2, **Clock Termination**.

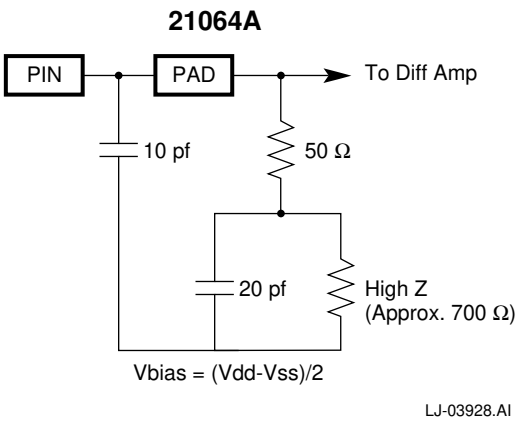

The following figure replaces Figure 14, **Package Dimensions**.

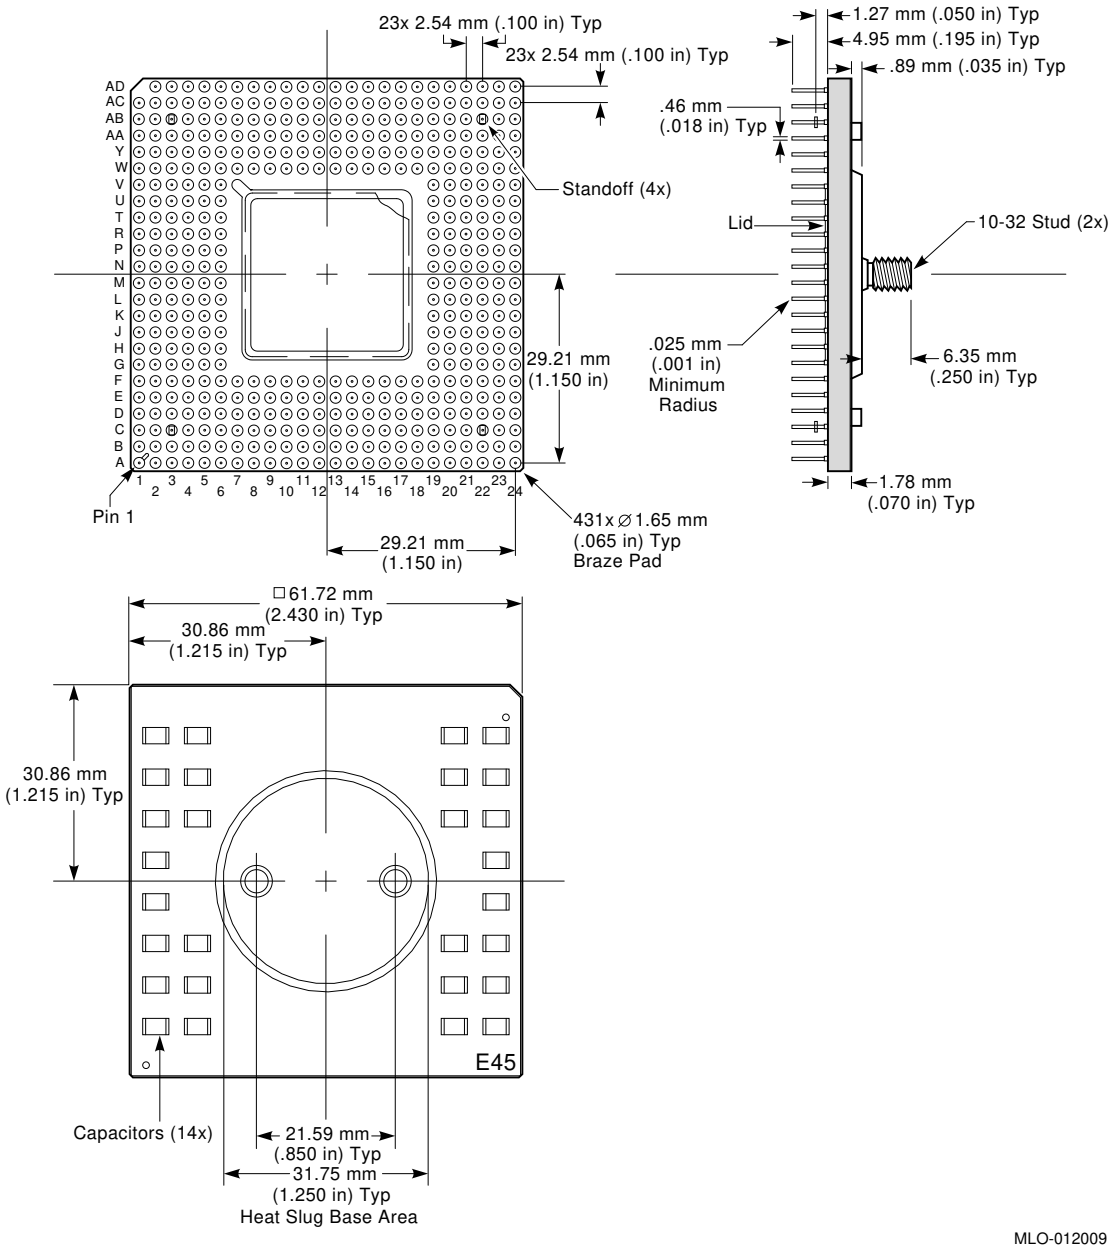

MLO-012009