digital

The RZ26B Fixed Disk Drive in the VAXstation 4000

EK-RZ26B-IN. A01

October 1992

This documentation package contains the following information for the RZ26B fixed disk drive:

- Illustration of the RZ26B drive
- SCSI ID settings
- Verifying the installation
- Drive specifications

Your *VAXstation 4000 Options Installation Guide* explains how to install disk drives in your system. You will need this document to set the correct SCSI address for the RZ26B disk.

Insert this document into your *VAXstation 4000 Options Installation Guide* (in the fixed disk drives chapter) for future reference.

____ Compatibility _____

The RZ26B can be installed *only* in the Model 60 and Model 90.

© Digital Equipment Corporation 1992. All rights reserved. The following are trademarks of Digital Equipment Corporation: TURBOchannel, VAXstation, and the Digital logo.

S2109

The RZ26B Fixed Disk Drive

The RZ26B Fixed Disk Drive

Preparing Your System	Use the instructions in the VAXstation 4000 Options Installation Guide to:Shut down your system					
	Remove the system unit coverPrevent static discharge by touching the "Touch Me First" label on the power supply					
	>>>SHOW CONFIG					
	DEVNBR	DEVNAM	INFO			
	10	SCSI	OK 0RZ24 5-	TZK10		
	Make a note of the SCSI IDs of your devices.					
	Refer to Figure 1 to choose a SCSI setting for your drive. Digital recommends SCSI settings 0, 1, 2, and 3 for fixed disk drives. Each device must have a unique SCSI ID. Never set two or more devices to the same SCSI ID; the system will not be able to communicate with the devices.					
	SCSI ID 6 Reserved					
	Do not use SCSI ID 6 for your drive. It is reserved for the controller.					

The RZ26B Fixed Disk Drive


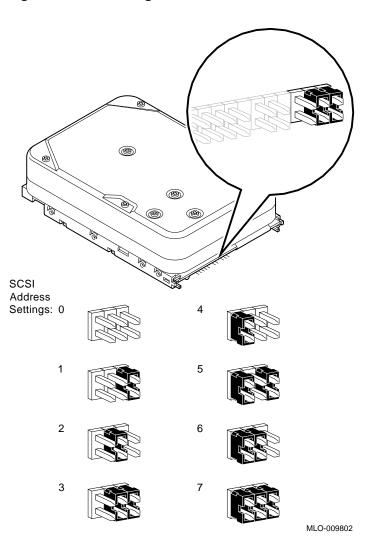


Figure 1 SCSI Settings on the RZ26B Fixed Disk Drive



Follow the instructions in the VAXstation 4000 Options Installation Guide to install this drive.

The RZ26B Fixed Disk Drive

 Verifying the Installation
 Enter the SHOW CONFIG command to verify that your installation was successful.

 >>>SHOW CONFIG

 DEVNBR
 DEVNAM

 10
 SCSI

 0K

 0--RZ24
 2--RZ26B

In this example the RZ26B drive was set to SCSI ID number 2.

RZ26B Fixed Disk Drive Specifications

Capacity

Table 1 provides the capacity specifications for the RZ26B fixed disk drive.

Table 1 RZ26B Fixed Disk Drive Storage Specifications

Formatted Storage Capacity			
Per drive	1.05 GB		
Per surface	80.9 MB		
Bytes per block	512		
Blocks per track	56 to 96		
Blocks per drive	50,860		
Spare cylinders	69		
Buffer size	256K		

RZ26B Fixed Disk Drive Specifications

Performance Table 2 provides performance specifications for the RZ26B fixed disk drive.

Performance Variable	Operating Conditions	
Data transfer rate to/from media	2.6 MB/sec to 4 MB/sec	
Data transfer rate to/from buffer	2.5 MB (asynchronous) to 5 MB (synchronous)	
Seek time track to track	2.5 msec	
Seek time average	10.5 msec	
Seek time maximum (full stroke)	22 msec	
Average latency	5.56 msec	
Rotational speed	5400 rpm	
Start time	14 ms (nominal) 20 MS (maximum)	
Stop time	20 ms (maximum)	
Interleave	1:1	

 Table 2
 RZ26B
 Performance
 Specifications

RZ26B Fixed Disk Drive Specifications

OperatingTable 3 provides the operating conditions for the RZ26B fixed**Conditions**disk drive.

Table 3 RZ26B Drive Operating Conditions

Operating Conditions	
5°C to 50°C (41°F to 122°F)	
8% to 80%	
-1000 ft to 10,000 ft above sea level	
28°C	
12.1 W (on idle)	
12° C per hour	

Nonoperating
ConditionsTable 4 provides the nonoperating conditions for the RZ26B fixed
disk drive.

Table 4 RZ26B Drive Nonoperating Conditions

Environmental Variable	Nonoperating Conditions
Ambient temperature	-40°C to 65°C (-40°F to 149°F)
Relative humidity	5% to 90%
Altitude	-305 M (-1000 ft) to 15,240 M (50,000 ft) above sea level
Maximum wet bulb	28°C
Temperature gradient	30° C per hour